



ACCEPTABLE TYPES OF DOOR WEATHERSTRIPPING


JAMB AND HEAD SEALS:

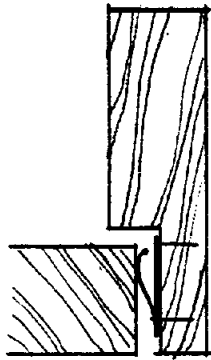


SPRING METAL

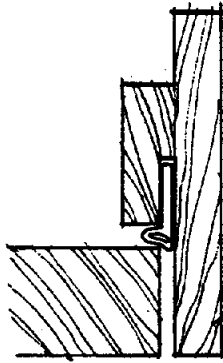

CONCEALED UNDER STOP (RABBIT BACK)

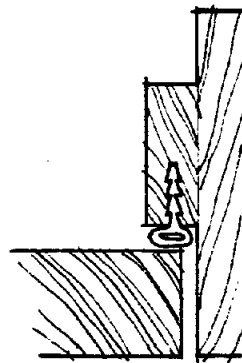


SET IN GROOVE IN STOP

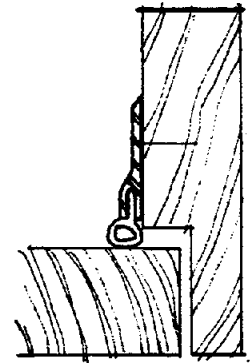


SURFACE MOUNTED ON STOP

EXPOSED METAL FINISHES MAY BE INCOMPATIBLE WITH ADJACENT PAINT FINISHES AND MAY REQUIRE PAINTING OF EXPOSED METAL

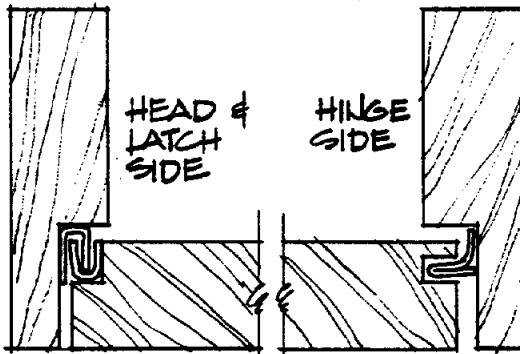


INTERLOCKING METAL (REQUIRES MILLING EDGES OF DOOR)

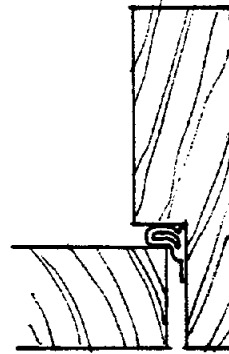


SELF-ADHESIVE SILICON COMPRESSION BULB. CAN ALSO BE APPLIED TO ASTRAGAL

MEETING STILE SEALS:

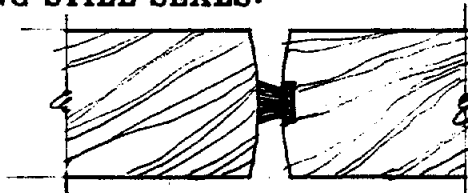


PILE SWEEP MORTISED IN EDGE OF STILE

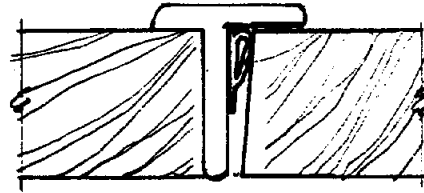


COMPRESSION BULB APPLIED TO ASTRAGAL

DOOR BOTTOM SEALS:

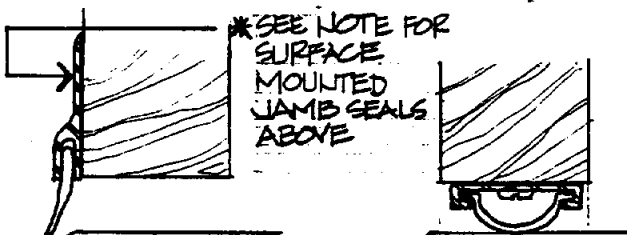

SURFACE MOUNTED PILE OR NEOPRENE SWEEP

BOTTOM MOUNTED NEOPRENE OR VINYL

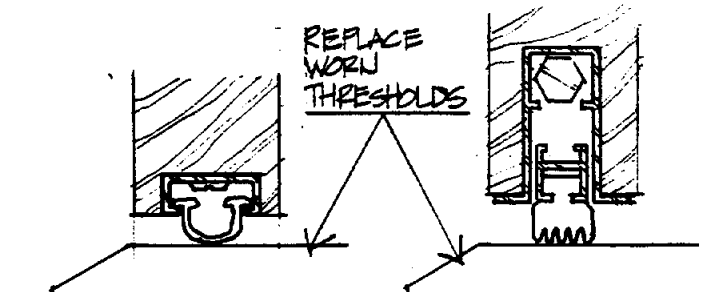

RECESSED NEOPRENE OR VINYL

AUTOMATIC DOOR BOTTOM

*SEE NOTE FOR SURFACE MOUNTED JAMB SEALS ABOVE

REPLACE WORN THRESHOLDS

THERMAL IMPROVEMENTS